




3-Way ball valve

SOLVENT SOCKET OUTLET - 220V ELECTRIC ACTUATOR - VITON ITEM 861



REFERENCE	DESCRIPTION	Net weight	Volumen (m³)	contenido.peso bruto	Unidades lote
111V503	3 WAY V. ELECT. SOLV. S. L FPM 32	1.594	0.04460	2.26	1
111V505	3 WAY V. ELECT. SOLV. S. L FPM 50	3.415	0.04460	4.08	1
111V506	3 WAY V. ELECT. SOLV. S. L FPM 63	4.370	0.04460	5.04	1
111V507	3 WAY V. ELECT. SOLV. S. L FPM 75	7.249	0.06149	8.09	1
111V543	3 WAY V. ELECT. SOLV. S. T FPM 32	0.000	0.04460	0.00	1
111V545	3 WAY V. ELECT. SOLV. S. T FPM 50	3.415	0.04460	4.08	1
111V546	3 WAY V. ELECT. SOLV. S. T FPM 63	4.370	0.04460	5.04	1
111V547	3 WAY V. ELECT. SOLV. S. T FPM 75	7.249	0.06149	8.09	1
111V844	3 WAY V. ELECT. SOLV. S. L FPM 40	0.000	0.04460	0.00	1
111V848	3 WAY V. ELECT. SOLV. S. L FPM 90	0.000	0.06149	0.00	1
111V854	3 WAY V. ELECT. SOLV. S. T FPM 40	0.000	0.04460	0.00	1
111V858	3 WAY V. ELECT. SOLV. S. T FPM 90	0.000	0.06149	0.00	1



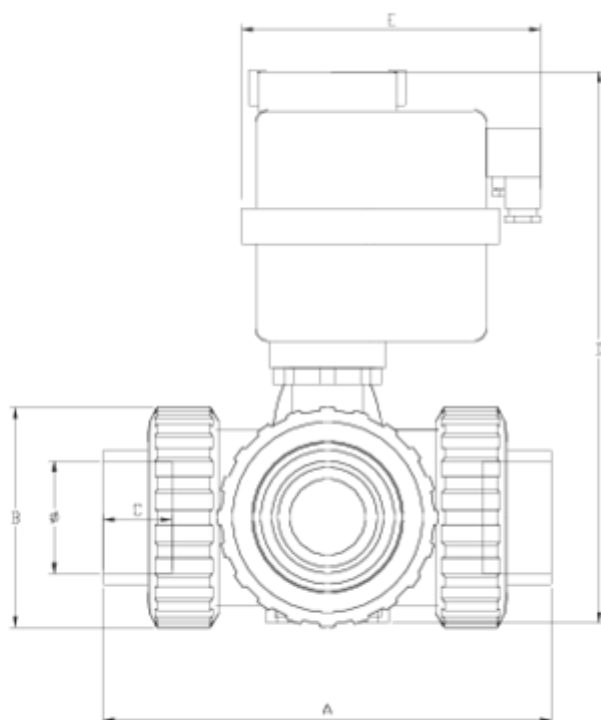

ITEM 861 | SOLVENT SOCKET OUTLET - 220V ELECTRIC ACTUATOR - VITON

VITON	f	Actuador	PESO (g)	DN	Modelo	A	B	C	D	E	PN	MEDIDA
11V503	32	H10	1612	25	L	160	72	22	220	169	PN16	MÉTRICO
11V844	40	H20	=D5-9	40	L	214	103	26	279	177	PN16	MÉTRICO
11V505	50	H20	3453	40	L	216	103	31	279	177	PN16	MÉTRICO
11V506	63	H35	4449	50	L	251	120	38	318	177	PN16	MÉTRICO
11V507	75	H55	7408	65	L	308	150	45	384	177	PN10	MÉTRICO
11V848	90	H55	=D7+309	65	L	=G7+24	150	51	384	177	PN10	MÉTRICO
11V543	32	H10	1608	25	T	160	72	22	220	169	PN16	MÉTRICO
11V854	40	H20	=D11-9	40	T	214	103	26	279	177	PN16	MÉTRICO
11V545	50	H20	3443	40	T	216	103	31	279	177	PN16	MÉTRICO
11V546	63	H35	4431	50	T	251	120	38	318	177	PN16	MÉTRICO






ITEM 861 | SOLVENT SOCKET OUTLET - 220V ELECTRIC ACTUATOR - VITON

11V547	75	H55	7368	65	T	308	150	45	384	177	PN10	MÉTRICO
11V858	90	H55	=D13+309	65	T	=G13+24	150	51	384	177	PN10	MÉTRICO





Product Documents



Product Certificates

Company Certificates



Pol. Ind. Plá Vallonga,
c/ Agua, 28
03006 ALICANTE (España)



+34 965 11 42 82



+34 965 11 48 62



tecnicocomercial@hidroten.es



Technical &
Commercial Service
+ 34 966 105 888



www.hidroten.es