



'Basic' ball valves

Male threaded outlet - Viton - Basic System ITEM 225



REFERENCE	DESCRIPTION	Net weight	Volumen (m ³)	contenido.peso bruto	Unidades lote
1011501	FPM BALL V. M. THREAD OUT. 1/2"	0.173	0.02244	7.54	40
1011502	FPM BALL V. M. THREAD OUT. 3/4"	0.233	0.02244	9.82	40
1011503	FPM BALL V. M. THREAD OUT. 1"	0.381	0.03682	12.03	30
1011504	FPM BALL V. M. THREAD OUT. 1 1/4"	0.659	0.03129	13.77	20
1011505	FPM BALL V. M. THREAD OUT. 1 1/2"	0.956	0.03682	14.94	15
1011506	FPM BALL V. M. THREAD OUT. 2"	1.522	0.04717	15.97	10
1011507	FPM BALL V. M. THREAD OUT. 2 1/2"	2.976	0.03129	12.48	4
1011508	FPM BALL V. M. THREAD OUT. 3"	4.858	0.02243	10.20	2



Pol. Ind. Plá Vallonga,
c/ Agua, 28
03006 ALICANTE (España)



+34 965 11 42 82



+34 965 11 48 62




tecnicocomercial@hidroten.es



Technical &
Commercial Service
+ 34 966 105 888



www.hidroten.es

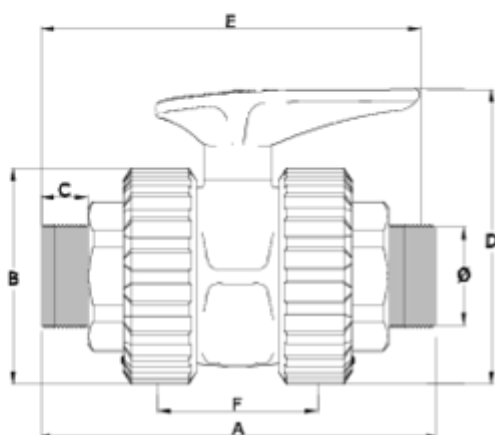

ITEM 225 | Male threaded outlet - Viton - Basic System

CÓDIGO	r	DN	PESO (g)	A	B	C	D	F	PN	TIPO ROSCA
11501	1/2"	15	173	118	52	14	78	47	PN16	BSP
11502	3/4"	20	226	130	59	16	84	51	PN16	BSP
11503	1"	25	381	160	70	19	97	66	PN16	BSP
11504	1 1/4"	32	658	176	84	21	128	72	PN16	BSP
11505	1 1/2"	40	956	197	99	22	142	77	PN16	BSP
11506	2"	50	1522	223	121	25	165	90	PN16	BSP
11507	2 1/2"	65	2976	284	151	31	222	121	PN10	BSP
11508	3"	80	4858	323	175	33	244	141	PN10	BSP





Product Documents



Product Certificates

Company Certificates



Pol. Ind. Plá Vallonga,
c/ Agua, 28
03006 ALICANTE (España)



+34 965 11 42 82



+34 965 11 48 62



tecnicocomercial@hidroten.es



Technical &
Commercial Service
+ 34 966 105 888



www.hidroten.es