



'basic' bi-directional ball valve

Female threaded outlet - 220V electric actuator - PTFE ITEM 656



REFERENCE	DESCRIPTION	Net weight	Volumen (m ³)	contenido.peso bruto	Unidades lote
111D309	BALL VALVE 220V ACTUATOR F/THREADED OUTLET 1/2"	1.216	0.03648	1.22	1
111D310	BALL VALVE 220V ACTUATOR F/THREADED OUTLET 3/4"	1.276	0.03648	1.28	1
111D311	BALL VALVE 220V ACTUATOR F/THREADED OUTLET 1"	1.450	0.03648	1.45	1
111D312	BALL VALVE 220V ACTUATOR F/THREADED OUTLET 1 1/4"	26.096	0.03648	26.10	1
111D313	BALL VALVE 220V ACTUATOR F/THREADED OUTLET 1 1/2"	3.275	0.04460	3.97	1
111D314	BALL VALVE 220V ACTUATOR F/THREADED OUTLET 2"	4.018	0.03648	4.51	1
111D315	V.BOLA BIDIREC. ACT.ELEC.R/H 2 1/2"	4.610	0.02243	5.04	1
111D316	V.BOLA BIDIREC. ACT.ELEC.R/H 3"	6.760	0.02243	7.18	1



Pol. Ind. Plá Vallonga,
c/ Agua, 28
03006 ALICANTE (España)



+34 965 11 42 82



+34 965 11 48 62




tecnicocomercial@hidroten.es



Technical &
Commercial Service
+ 34 966 105 888



www.hidroten.es

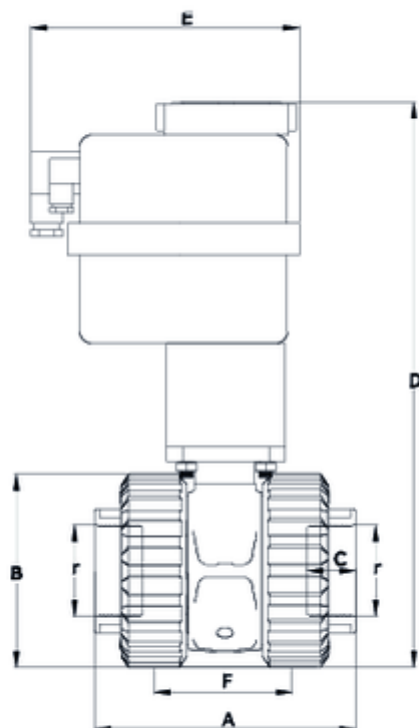

ITEM 656 | Female threaded outlet - 220V electric actuator - PTFE

C??DIGO	r	Actuador	PESO (g)	DN	A	B	C	D	E	F	PN	TIPO ROSCA
11D309	1/2"	H10	1080	15	86	55	17	227	177	44	PN16	BSP
11D310	3/4"	H10	1124.2	20	99	62	20	232	177	49	PN16	BSP
11D311	1"	H10	1261.1	25	122	72	23	243	177	66	PN16	BSP
11D312	1 1/4"	H20	2119.85	32	131	88	26	265	177	71	PN16	BSP
11D313	1 1/2"	H20	2398.24	40	155	103	33	282	177	75	PN16	BSP
11D314	2"	H20	2952	50	180	120	29	390	177	89	PN16	BSP
11D315	2 1/2"	H35	4610	65	202	150	33	401	177	119	PN10	BSP
11D316	3"	H55	6760	80	232	181	36	450	177	140	PN10	BSP



Pol. Ind. Plá Vallonga,
c/ Agua, 28
03006 ALICANTE (España)



+34 965 11 42 82



+34 965 11 48 62



tecnicocomercial@hidroten.es



Technical &
Commercial Service
+ 34 966 105 888



www.hidroten.es



Product Documents



Product Certificates

Company Certificates



Pol. Ind. Plá Vallonga,
c/ Agua, 28
03006 ALICANTE (España)



+34 965 11 42 82



+34 965 11 48 62



tecnicocomercial@hidroten.es



Technical &
Commercial Service
+ 34 966 105 888



www.hidroten.es