



'basic' bi-directional ball valve

## Plain/threaded outlet - single acting spring return actuator - Viton

ITEM 674



| REFERENCE | DESCRIPTION                                        | Net weight | Volumen (m³) | contenido.peso bruto | Unidades lote |
|-----------|----------------------------------------------------|------------|--------------|----------------------|---------------|
| 111D580   | VIT.B.VAL.SIM.ACT.PNEU.ACCT.S.S./F.T.OUT.20-1/2"   | 1.612      | 0.03648      | 2.20                 | 1             |
| 111D581   | VIT.B.VAL.SIM.ACT.PNEU.ACCT.S.S./F.T.OUT.25-3/4"   | 1.672      | 0.03648      | 2.26                 | 1             |
| 111D582   | VIT.B.VAL.SIM.ACT.PNEU.ACCT.S.S./F.T.OUT.32-1"     | 1.845      | 0.03648      | 2.43                 | 1             |
| 111D583   | VIT.B.VAL.SIM.ACT.PNEU.ACCT.S.S./F.T.OUT.40-1 1/4" | 2.699      | 0.03648      | 3.29                 | 1             |
| 111D584   | VIT.B.VAL.SIM.ACT.PNEU.ACCT.S.S./F.T.OUT.50-1 1/2" | 3.075      | 0.04460      | 3.74                 | 1             |
| 111D585   | VIT.B.VAL.SIM.ACT.PNEU.ACCT.S.S./F.T.OUT.63-2"     | 3.622      | 0.04460      | 4.29                 | 1             |
| 111D586   | V.B.BID.ACT.N S/E S/MIXTA 2 1/2" FPM               | 5.678      | 0.02243      | 0.00                 | 1             |
| 111D587   | V.B.BID.ACT.N S/E S/MIXTA 3" FPM                   | 11.540     | 0.02243      | 0.00                 | 1             |



Pol. Ind. Plá Vallonga,  
c/ Agua, 28  
03006 ALICANTE (España)



+34 965 11 42 82



+34 965 11 48 62




tecnicocomercial@hidroten.es



Technical &  
Commercial Service  
+ 34 966 105 888



www.hidroten.es

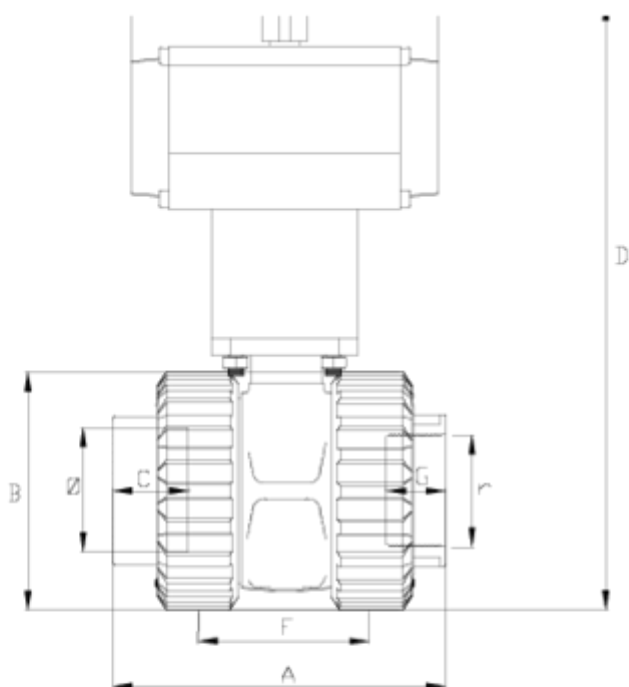

## ITEM 674 | Plain/threaded outlet - single acting spring return actuator - Viton

| CÓDIGO | f - r     | Actuador | PESO (g) | DN | A   | B   | C  | D   | E   | F   | G  | PN   | TIPO ROSCA |
|--------|-----------|----------|----------|----|-----|-----|----|-----|-----|-----|----|------|------------|
| 11D580 | 20-1/2"   | H050SE   | 1384.8   | 15 | 86  | 55  | 16 | 192 | 138 | 44  | 17 | PN16 | BSP        |
| 11D581 | 25-3/4"   | H050SE   | 1428.92  | 20 | 99  | 62  | 19 | 197 | 138 | 49  | 20 | PN16 | BSP        |
| 11D582 | 32-1"     | H050SE   | 1562.25  | 25 | 122 | 72  | 23 | 208 | 138 | 66  | 23 | PN16 | BSP        |
| 11D583 | 40-1 1/4" | H063SE   | 2421     | 32 | 131 | 88  | 25 | 248 | 155 | 71  | 26 | PN16 | BSP        |
| 11D584 | 50-1 1/2" | H063SE   | 2713.92  | 40 | 155 | 103 | 31 | 265 | 155 | 75  | 33 | PN16 | BSP        |
| 11D585 | 63-2"     | H063SE   | 3234.4   | 50 | 180 | 120 | 38 | 307 | 155 | 89  | 29 | PN16 | BSP        |
| 11D586 | 75-2 1/2" | H075SE   | 6050     | 65 | 202 | 150 | 45 | 376 | 210 | 119 | 33 | PN10 | BSP        |
| 11D587 | 90-3"     | H100SE   | 11110    | 80 | 245 | 181 | 51 | 426 | 280 | 140 | 36 | PN10 | BSP        |





## Product Documents



## Product Certificates

## Company Certificates



Pol. Ind. Plá Vallonga,  
c/ Agua, 28  
03006 ALICANTE (España)



+34 965 11 42 82



+34 965 11 48 62



tecnicocomercial@hidroten.es



Technical &  
Commercial Service  
+ 34 966 105 888



www.hidroten.es