



'basic' bi-directional ball valve

## Solvent socket outlet - 220V electric actuator - Viton ITEM 668



| REFERENCE | DESCRIPTION                                  | Net weight | Volumen (m <sup>3</sup> ) | contenido.peso bruto | Unidades lote |
|-----------|----------------------------------------------|------------|---------------------------|----------------------|---------------|
| 111D349   | BALL VALVE 220V ACTUATOR SOLV.SOCK.OUTLET 20 | 1.212      | 0.03648                   | 1.80                 | 1             |
| 111D350   | BALL VALVE 220V ACTUATOR SOLV.SOCK.OUTLET 25 | 1.268      | 0.03648                   | 1.85                 | 1             |
| 111D351   | BALL VALVE 220V ACTUATOR SOLV.SOCK.OUTLET 32 | 1.440      | 0.00891                   | 2.03                 | 1             |
| 111D352   | BALL VALVE 220V ACTUATOR SOLV.SOCK.OUTLET 40 | 2.590      | 0.03648                   | 3.18                 | 1             |
| 111D353   | V.BOLA BIDIREC. ACT ELEC S/E 50 FPM          | 2.956      | 0.04460                   | 3.62                 | 1             |
| 111D354   | BALL VALVE 220V ACTUATOR SOLV.SOCK.OUTLET 63 | 3.472      | 0.04460                   | 4.14                 | 1             |
| 111D355   | V.BOLA BIDIREC. ACT ELEC S/E 75 FPM          | 4.622      | 0.02243                   | 0.00                 | 1             |
| 111D356   | V.BOLA BIDIREC. ACT ELEC S/E 90 FPM          | 6.084      | 0.02243                   | 0.00                 | 1             |



Pol. Ind. Plá Vallonga,  
c/ Agua, 28  
03006 ALICANTE (España)



+34 965 11 42 82



+34 965 11 48 62




tecnicocomercial@hidroten.es



Technical &  
Commercial Service  
+ 34 966 105 888



www.hidroten.es

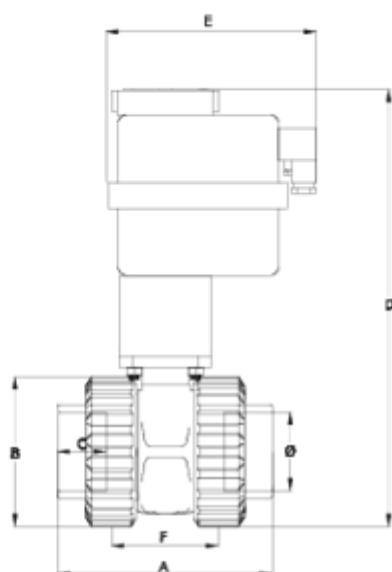

## ITEM 668 | Solvent socket outlet - 220V electric actuator - Viton

| CÓDIGO | f  | Actuador | PESO (g) | DN | A   | B   | C  | D   | E   | F   | PN   | MEDIDA  |
|--------|----|----------|----------|----|-----|-----|----|-----|-----|-----|------|---------|
| 11D349 | 20 | H10      | 1077.6   | 15 | 86  | 55  | 16 | 227 | 177 | 44  | PN16 | MÉTRICO |
| 11D350 | 25 | H10      | 1119.48  | 20 | 94  | 62  | 19 | 232 | 177 | 49  | PN16 | MÉTRICO |
| 11D351 | 32 | H10      | 1258.8   | 25 | 122 | 72  | 23 | 243 | 177 | 66  | PN16 | MÉTRICO |
| 11D352 | 40 | H20      | 2118.7   | 32 | 131 | 88  | 25 | 265 | 177 | 71  | PN16 | MÉTRICO |
| 11D353 | 50 | H20      | 2375.84  | 40 | 150 | 103 | 31 | 282 | 177 | 75  | PN16 | MÉTRICO |
| 11D354 | 63 | H20      | 2839.8   | 50 | 177 | 120 | 38 | 390 | 177 | 89  | PN16 | MÉTRICO |
| 11D355 | 75 | H35      | 4550     | 65 | 216 | 150 | 45 | 401 | 177 | 119 | PN10 | MÉTRICO |
| 11D356 | 90 | H55      | 6630     | 80 | 257 | 181 | 51 | 450 | 177 | 140 | PN10 | MÉTRICO |





## Product Documents



## Product Certificates

## Company Certificates



Pol. Ind. Plá Vallonga,  
c/ Agua, 28  
03006 ALICANTE (España)



+34 965 11 42 82



+34 965 11 48 62



tecnicocomercial@hidroten.es



Technical &  
Commercial Service  
+ 34 966 105 888



www.hidroten.es