





PVC check valves (with spring)

Female threaded outlet - Foot - Viton seal ITEM 275

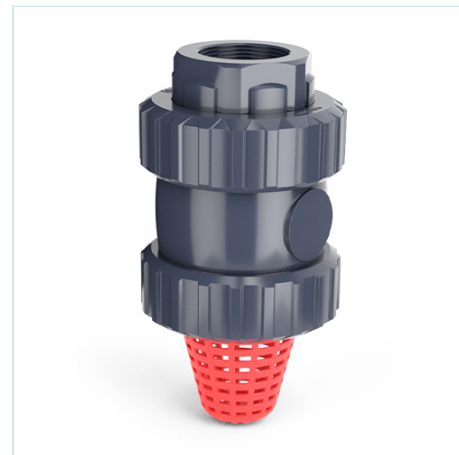

REFERENCE	DESCRIPTION	Net weight	Volumen (m ³)	contenido.peso bruto	Unidades lote
1016611	PVC FOOT CHECK V. (W/SPRING) FEM.TH.1/2"FPM	0.128	0.01553	5.36	40
1016612	PVC FOOT CHECK V. (W/SPRING) FEM.TH.3/4"FPM	0.161	0.02244	6.98	40
1016613	PVC FOOT CHECK V. (W/SPRING) FEM.TH.1"FPM	0.271	0.02244	8.63	30
1016614	PVC FOOT CHECK V. (W/SPRING) FEM.TH.1 1/4"FPM	0.450	0.03129	9.56	20
1016615	PVC FOOT CHECK V. (W/SPRING) FEM.TH.1 1/2"FPM	0.682	0.02244	8.72	12
1016616	PVC FOOT CHECK V. (W/SPRING) FEM.TH.2"FPM	1.075	0.04717	13.44	12
1016617	PVC FOOT CHECK V. (W/SPRING) FEM.TH.2 1/2"FPM	2.204	0.03129	9.38	4
1016618	PVC FOOT CHECK V. (W/SPRING) FEM.TH.3"FPM	3.805	0.03129	8.17	2



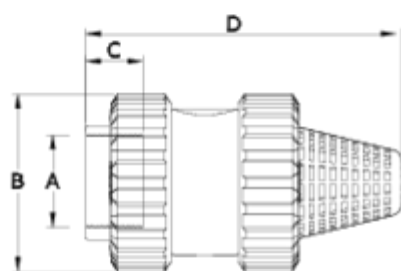

ITEM 275 | Female threaded outlet - Foot - Viton seal

Código Viton	A	Peso	B	C	D	PN	TIPO ROSCA
16611	1/2"	127	52	16	106	PN16	BSP
16612	3/4"	164	59	17	118	PN16	BSP
16613	1"	272	69	21	147	PN16	BSP
16614	1 1/4"	448	85	23	164	PN16	BSP
16615	1 1/2"	682	99	31	175	PN16	BSP
16616	2"	1075	116	38	200	PN16	BSP
16617	2 1/2"	2400	150	44	260	PN10	BSP
16618	3"	4120	178	52	303	PN10	BSP





Product Documents



Product Certificates

Company Certificates



Pol. Ind. Plá Vallonga,
c/ Agua, 28
03006 ALICANTE (España)



+34 965 11 42 82



+34 965 11 48 62



tecnicocomercial@hidroten.es



Technical &
Commercial Service
+ 34 966 105 888



www.hidroten.es