



PVC check valves (with spring)


Female threaded outlet - Viton seal

ITEM 267



REFERENCE	DESCRIPTION	Net weight	Volumen (m ³)	contenido.peso bruto	Unidades lote
1016511	PVC CHECK V. (W/SPR), FEMALE THR.1/2" FPM	0.138	0.01553	6.12	40
1016512	PVC CHECK V. (W/SPR), FEMALE THR.3/4" FPM	0.176	0.01553	7.28	40
1016513	PVC CHECK V. (W/SPR), FEMALE THR.1" FPM	0.305	0.02244	9.64	30
1016514	PVC CHECK V. (W/SPR), FEMALE THR.1 1/4" FPM	0.495	0.02244	10.44	20
1016515	PVC CHECK V. (W/SPR), FEMALE THR.1 1/2" FPM	0.714	0.02244	9.06	12
1016516	PVC CHECK V. (W/SPR), FEMALE THR.2" FPM	1.192	0.03129	12.49	10
1016517	PVC CHECK V. (W/SPR), FEMALE THR.2 1/2" FPM	2.218	0.03129	9.43	4
1016518	PVC CHECK V. (W/SPR), FEMALE THR.3" FPM	3.726	0.02244	7.99	2



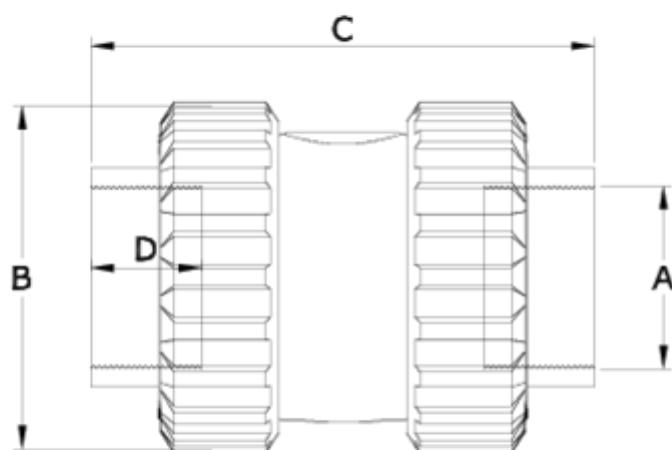

ITEM 267 | Female threaded outlet - Viton seal

Código Viton	A	Peso	B	C	D	PN	TIPO ROSCA
16511	1/2"	139	52	90	16	PN16	BSP
16512	3/4"	181	59	100	17	PN16	BSP
16513	1"	296	69	123	21	PN16	BSP
16514	1 1/4"	497	85	135	23	PN16	BSP
16515	1 1/2"	712	99	155	31	PN16	BSP
16516	2"	1125	116	163	38	PN16	BSP
16517	2 1/2"	2683	150	205	44	PN10	BSP
16518	3"	4320	178	231	52	PN10	BSP





Product Documents



Product Certificates

Company Certificates



Pol. Ind. Plá Vallonga,
c/ Agua, 28
03006 ALICANTE (España)



+34 965 11 42 82



+34 965 11 48 62



tecnicocomercial@hidroten.es



Technical &
Commercial Service
+ 34 966 105 888



www.hidroten.es