




PVC check valves (with spring)

Plain/threaded outlet - Viton seal

ITEM 270

REFERENCE	DESCRIPTION	Net weight	Volumen (m ³)	contenido.peso bruto	Unidades lote
1016521	PVC CHECK V. (W/SPR), PLAIN-F.THR.1/2"-20 FPM	0.135	0.01553	5.64	40
1016522	PVC CHECK V. (W/SPR), PLAIN-F.THR.3/4"-25 FPM	0.177	0.01553	7.32	40
1016523	PVC CHECK V. (W/SPR), PLAIN-F.THR.1"-32 FPM	0.289	0.02244	9.21	30
1016524	PVC CHECK V. (W/SPR), PLAIN-F.THR.1 1/4"-40 FPM	0.484	0.02244	10.22	20
1016525	PVC CHECK V. (W/SPR), PLAIN-F.THR.1 1/2"-50 FPM	0.700	0.03129	8.96	12
1016526	PVC CHECK V. (W/SPR), PLAIN-F.THR.2"-63 FPM	1.135	0.03129	11.91	10
1016527	PVC CHECK V. (W/SPR), PLAIN-F.THR.2 1/2"-75 FPM	2.207	0.03129	9.39	4
1016528	PVC CHECK V. (W/SPR), PLAIN-F.THR.3"-90 FPM	3.661	0.03129	7.88	2



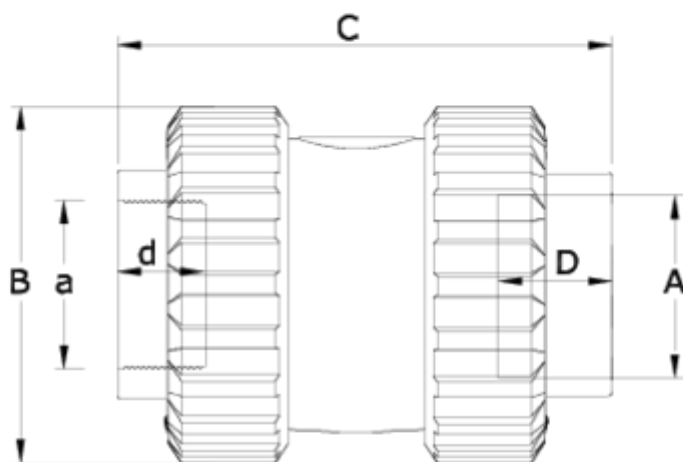

ITEM 270 | Plain/threaded outlet - Viton seal

Código Viton	A	a	Peso	B	C	D	d	PN	TIPO ROSCA
16521	20	1/2"	135	52	88	17	16	PN16	BSP
16522	25	3/4"	177	59	97	19	17	PN16	BSP
16522	32	1"	289	69	121	24	21	PN16	BSP
16522	40	1 1/4"	484	85	134	26	23	PN16	BSP
16522	50	1 1/2"	696	99	153	31	31	PN16	BSP
16522	63	2"	1111	116	169	38	38	PN16	BSP
16522	75	2 1/2"	2649	150	211	44	44	PN10	BSP
16522	90	3"	4258	178	246	51	52	PN10	BSP





Product Documents



Product Certificates

Company Certificates



Pol. Ind. Plá Vallonga,
c/ Agua, 28
03006 ALICANTE (España)



+34 965 11 42 82



+34 965 11 48 62



tecnicocomercial@hidroten.es



Technical &
Commercial Service
+ 34 966 105 888



www.hidroten.es