





PVC check valves (with spring)

Reinforced female threaded outlet - Foot - Viton seal ITEM 601

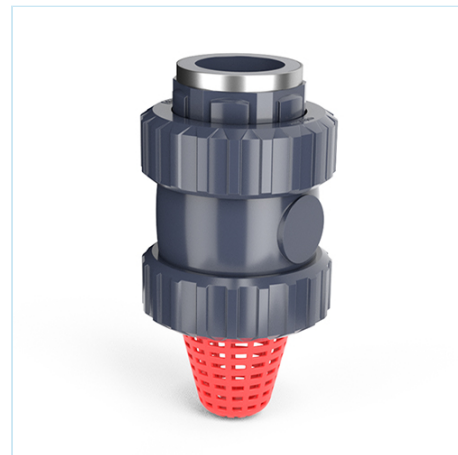

REFERENCE	DESCRIPTION	Net weight	Volumen (m ³)	contenido.peso bruto	Unidades lote
1016730	PVC FOOT CHECK V. (W/S) FEM.TH.REINF.1/2" FPM	0.128	0.01553	5.36	40
1016731	PVC FOOT CHECK V. (W/S) FEM.TH.REINF.3/4" FPM	0.161	0.02244	6.98	40
1016732	PVC FOOT CHECK V. (W/S) FEM.TH.REINF.1" FPM	0.266	0.02244	8.51	30
1016733	PVC FOOT CHECK V. (W/S) FEM.TH.REINF.1 1/4" FPM	0.450	0.03129	9.56	20
1016734	PVC FOOT CHECK V. (W/S) FEM.TH.REINF.1 1/2" FPM	0.682	0.02244	8.72	12
1016735	PVC FOOT CHECK V. (W/S) FEM.TH.REINF.2" FPM	1.075	0.02244	13.44	12
1016736	PVC FOOT CHECK V. (W/S) FEM.TH.REINF.2 1/2" FPM	2.201	0.03129	9.38	4
1016737	PVC FOOT CHECK V. (W/S) FEM.TH.REINF.3" FPM	3.805	0.03129	8.17	2



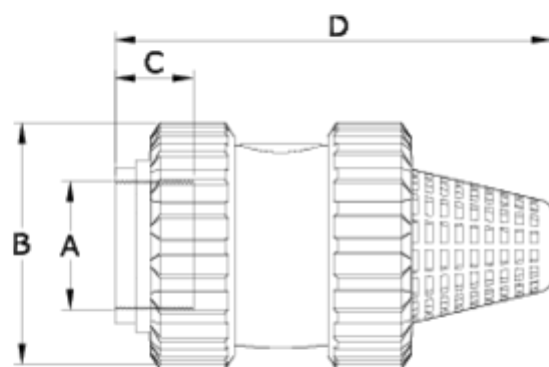


ITEM 601 | Reinforced female threaded outlet - Foot - Viton seal

Código Viton	A	Peso	B	C	D	PN	TIPO ROSCA
16730	1/2"	137	52	16	106	PN16	BSP
16731	3/4"	175	59	17	118	PN16	BSP
16732	1"	285	69	21	147	PN16	BSP
16733	1 1/4"	462	85	23	164	PN16	BSP
16734	1 1/2"	700	99	31	175	PN16	BSP
16735	2"	1096	116	38	200	PN16	BSP
16736	2 1/2"	2425	150	44	260	PN10	BSP
16737	3"	4150	178	52	303	PN10	BSP





Product Documents



Product Certificates

Company Certificates



Pol. Ind. Plá Vallonga,
c/ Agua, 28
03006 ALICANTE (España)



+34 965 11 42 82



+34 965 11 48 62



tecnicocomercial@hidroten.es



Technical &
Commercial Service
+ 34 966 105 888



www.hidroten.es