




PVC check valves (with spring)

Thermofusion outlet - Foot - Viton seal ITEM 694

REFERENCE	DESCRIPTION	Net weight	Volumen (m ³)	contenido.peso bruto	Unidades lote
1016631	PVC FOOT CHECK V. (W/SPR), THERMO O.20 FPM	0.129	0.02244	5.70	40
1016632	PVC FOOT CHECK V. (W/SPR), THERMO O.25 FPM	0.156	0.03129	6.80	40
1016633	PVC FOOT CHECK V. (W/SPR), THERMO O.32 FPM	0.263	0.03129	8.45	30
1016634	PVC FOOT CHECK V. (W/SPR), THERMO O.40 FPM	0.422	0.03129	7.31	16
1016635	PVC FOOT CHECK V. (W/SPR), THERMO O.50 FPM	0.611	0.03682	9.80	15
1016636	PVC FOOT CHECK V. (W/SPR), THERMO O.63 FPM	1.165	0.04836	12.32	10
1016637	PVC FOOT CHECK V. (W/SPR), THERMO O.75 FPM	2.200	0.04717	11.76	5
1016638	PVC FOOT CHECK V. (W/SPR), THERMO O.90 FPM	3.488	0.03129	7.54	2



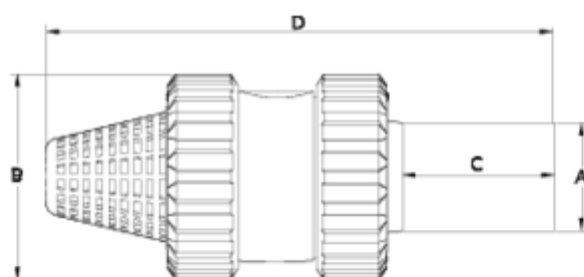

ITEM 694 | Thermofusion outlet - Foot - Viton seal

Código Vitón	A	Peso	B	C	D	PN	MEDIDA
16631	20	110	52	62	170	PN16	MÉTRICO
16632	25	140	59	62	178	PN16	MÉTRICO
16633	32	233	69	46	195	PN16	MÉTRICO
16634	40	378	85	64	226	PN16	MÉTRICO
16635	50	524	99	79	253	PN16	MÉTRICO
16636	63	862	116	89	270	PN16	MÉTRICO
16637	75	2279	150	91	341	PN10	MÉTRICO
16638	90	3496	178	100	400	PN10	MÉTRICO





Product Documents



Product Certificates

Company Certificates



Pol. Ind. Plá Vallonga,
c/ Agua, 28
03006 ALICANTE (España)



+34 965 11 42 82



+34 965 11 48 62



tecnicocomercial@hidroten.es



Technical &
Commercial Service
+ 34 966 105 888



www.hidroten.es