




## Válvulas de bola 'Basic'

# Salida fittings R/H - PTFE - Sistema Basic® ITEM 218

| REFERENCIA | DESCRIPCIÓN                     | Peso<br>neto | Volumen<br>(m <sup>3</sup> ) | contenido.peso<br>bruto | Unidades<br>lote |
|------------|---------------------------------|--------------|------------------------------|-------------------------|------------------|
| 1011400    | VALV ENL R/FIT. 20-1/2" PTFE    | 0.178        | 0.02244                      | 7.66                    | 40               |
| 1011401    | VALV ENL R/FIT. 25-3/4" PTFE    | 0.265        | 0.03129                      | 11.17                   | 40               |
| 1011402    | VALV ENL R/FIT. 32-1" PTFE      | 0.410        | 0.03682                      | 12.86                   | 30               |
| 1011403    | VALV ENL R/FIT. 40-1 1/4" PTFE  | 0.793        | 0.03129                      | 16.43                   | 20               |
| 1011404    | VALV ENL R/FIT. 50- 1 1/2" PTFE | 0.984        | 0.03682                      | 15.38                   | 15               |
| 1011405    | VALV ENL R/FIT. 63-2" PTFE      | 1.601        | 0.04717                      | 16.77                   | 10               |
| 1011406    | VALV ENL R/FIT. 75-2 1/2" PTFE  | 1.900        | 0.04717                      | 8.36                    | 4                |
| 1011407    | VALV ENL R/FIT. 90-3" PTFE      | 5.688        | 0.03648                      | 11.97                   | 2                |
| 1011408    | VALV ENL R/FIT. 110-4" PTFE     | 6.672        | 0.03648                      | 7.37                    | 1                |



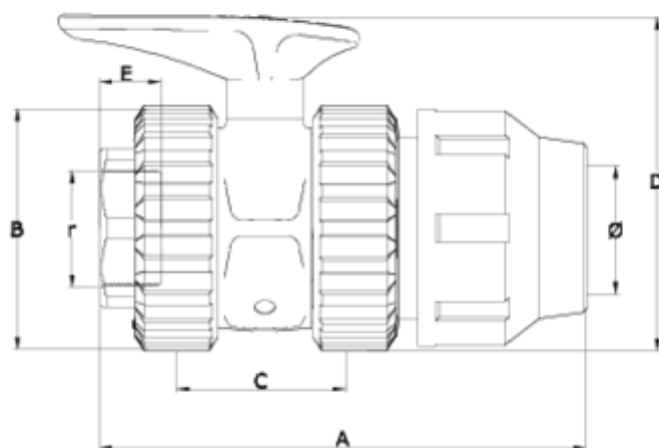

## ITEM 218 | Salida fittings R/H - PTFE - Sistema Basic®

| CÓDIGO | f - r     | PESO (g) | DN  | A   | B   | C   | D   | E  | PN   | TIPO ROSCA |
|--------|-----------|----------|-----|-----|-----|-----|-----|----|------|------------|
| 11400  | 20-1/2"   | 178      | 15  | 147 | 52  | 47  | 78  | 17 | PN16 | BSP        |
| 11401  | 25-3/4"   | 265      | 20  | 154 | 59  | 51  | 84  | 20 | PN16 | BSP        |
| 11402  | 32-1"     | 410      | 25  | 183 | 70  | 66  | 97  | 23 | PN16 | BSP        |
| 11403  | 40-1 1/4" | 793      | 32  | 203 | 84  | 72  | 128 | 26 | PN16 | BSP        |
| 11404  | 50-1 1/2" | 984      | 40  | 230 | 99  | 77  | 142 | 33 | PN16 | BSP        |
| 11405  | 63-2"     | 1601     | 50  | 270 | 121 | 90  | 165 | 29 | PN16 | BSP        |
| 11406  | 75-2 1/2" | 1900     | 65  | 323 | 151 | 121 | 222 | 33 | PN10 | BSP        |
| 11407  | 90-3"     | 5688     | 80  | 378 | 175 | 141 | 244 | 36 | PN10 | BSP        |
| 11408  | 110-4"    | 6672     | 100 | 446 | 210 | 155 | 307 | 42 | PN10 | BSP        |





## Documentación de Producto



## Certificados de Producto

## Certificados de Empresa



Pol. Ind. Plá Vallonga,  
c/ Agua, 28  
03006 ALICANTE (España)



+34 965 11 42 82



+34 965 11 48 62



tecnicocomercial@hidroten.es



Servicio Atención  
Técnica comercial  
+ 34 966 105 888



www.hidroten.es