




3-Way ball valve

THREADED FEMALE OUTLET - FPM ITEM 854




REFERÊNCIA	DESCRIÇÃO	Peso líquido	Volume (m ³)	contenido.peso bruto	Unidades por lote
111V113	VÁLVULA BOLA 3 VÍAS MODELO "L" S/R/H 1" VITON	0.681	0.03129	3.86	4
111V115	VÁLVULA BOLA 3 VÍAS MODELO "L" S/R/H 1 1/2" VITON	1.696	0.04460	4.87	2
111V116	VÁLVULA BOLA 3 VÍAS MODELO "L" S/R/H 2" VITON	2.539	0.04460	6.55	2
111V117	VÁLVULA BOLA 3 VÍAS MODELO "L" S/R/H 2 1/2" VITON	4.956	0.03892	6.08	1
111V153	VÁLVULA BOLA 3 VÍAS MODELO "T" S/R/H 1" VITON	0.678	0.03129	3.85	4
111V155	VÁLVULA BOLA 3 VÍAS MODELO "T" S/R/H 1 1/2" VITON	1.696	0.04460	4.87	2
111V156	VÁLVULA BOLA 3 VÍAS MODELO "T" S/R/H 2" VITON	2.539	0.04460	6.55	2
111V157	VÁLVULA BOLA 3 VÍAS MODELO "T" S/R/H 2 1/2" VITON	4.956	0.03892	6.08	1



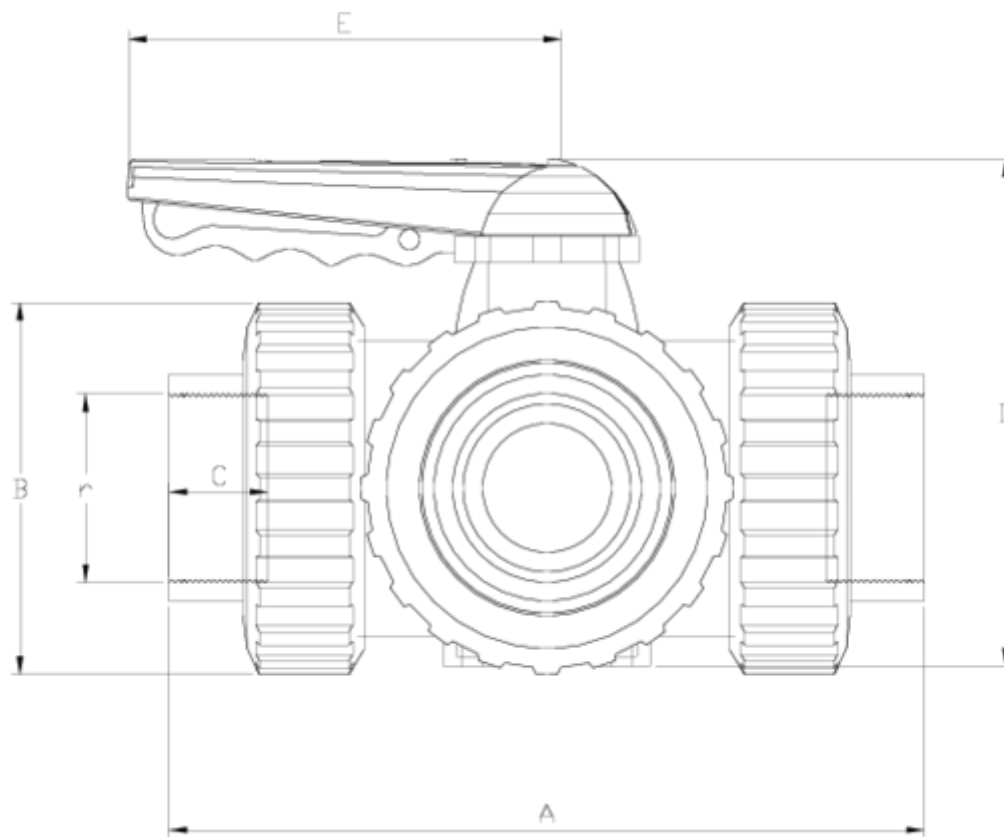

ITEM 854 | THREADED FEMALE OUTLET - FPM

VITÓN	r	PESO (g)	DN	Modelo	A	B	C	D	E	PN	TIPO ROSCA
11V113	1"	736	25	L	162	72	23	121	114	PN16	BSP
11V115	1 1/2"	1731	40	L	210	103	33	155	140	PN16	BSP
11V116	2"	2618	50	L	261	120	29	172	140	PN16	BSP
11V117	2 1/2"	5113	65	L	322	150	33	218	160	PN10	BSP
11V153	1"	732	25	T	162	72	23	121	114	PN16	BSP
11V155	1 1/2"	1721	40	T	210	103	33	155	140	PN16	BSP
11V156	2"	2600	50	T	261	120	29	172	140	PN16	BSP
11V157	2 1/2"	5073	65	T	322	150	33	218	160	PN10	BSP





Documentação do Produto



Certificados do Produto

Certificados da Empresa

