




3-Way ball valve

THREADED FEMALE OUTLET

ITEM 850

REFERÊNCIA	DESCRIÇÃO	Peso líquido	Volume (m³)	contenido.peso bruto	Unidades por lote
111V013	VÁLVULA BOLA 3 VÍAS MODELO "L" S/R/H 1"	0.681	0.03129	3.86	4
111V015	VÁLVULA BOLA 3 VÍAS MODELO "L" S/R/H 1 1/2"	1.698	0.04460	5.25	2
111V016	VÁLVULA BOLA 3 VÍAS MODELO "L" S/R/H 2"	3.212	0.04460	7.15	2
111V017	VÁLVULA BOLA 3 VÍAS MODELO "L" S/R/H 2 1/2"	4.956	0.03892	5.83	1
111V053	VÁLVULA BOLA 3 VÍAS MODELO "T" S/R/H 1"	0.678	0.03129	3.85	4
111V055	VÁLVULA BOLA 3 VÍAS MODELO "T" S/R/H 1 1/2"	1.762	0.04460	5.34	2
111V056	VÁLVULA BOLA 3 VÍAS MODELO "T" S/R/H 2"	2.615	0.04460	7.05	2
111V057	VÁLVULA BOLA 3 VÍAS MODELO "T" S/R/H 2 1/2"	5.111	0.03892	5.99	1



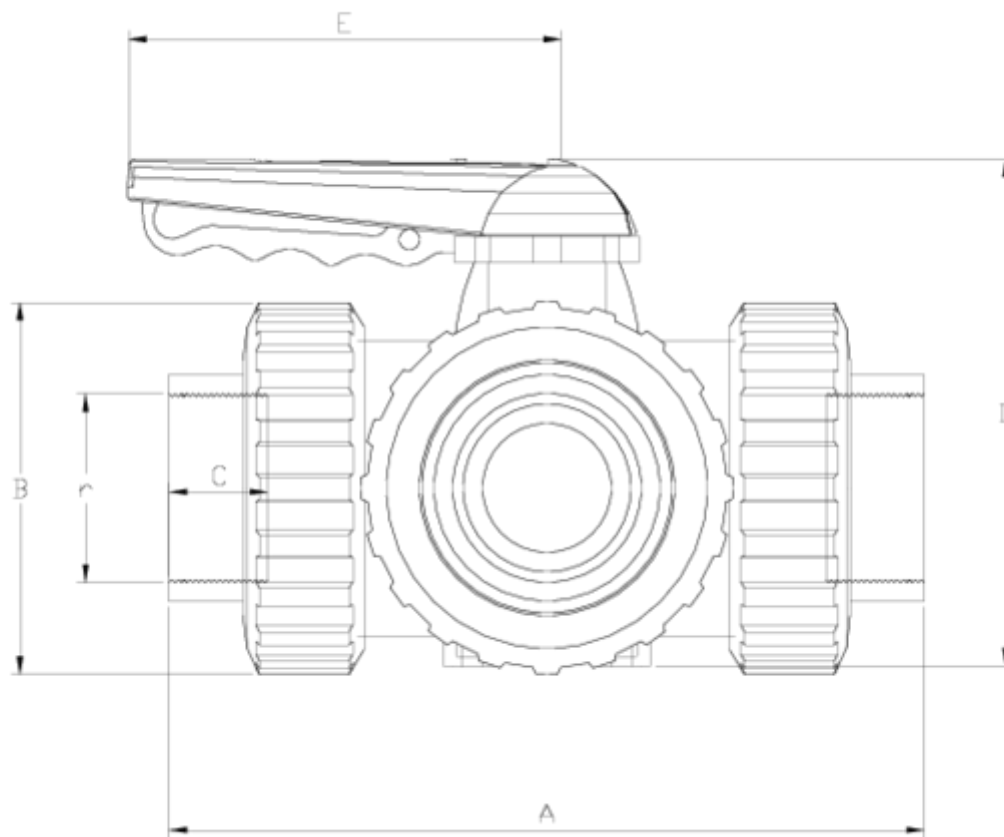

ITEM 850 | THREADED FEMALE OUTLET

PTFE	r	PESO (g)	DN	Modelo	A	B	C	D	E	PN	TIPO ROSCA
11V013	1"	736	25	L	162	72	23	121	114	PN16	BSP
11V015	1 1/2"	1731	40	L	210	103	33	155	140	PN16	BSP
11V016	2"	2618	50	L	261	120	29	172	140	PN16	BSP
11V017	2 1/2"	5113	65	L	322	150	33	218	160	PN10	BSP
11V053	1"	732	25	T	162	72	23	121	114	PN16	BSP
11V055	1 1/2"	1721	40	T	210	103	33	155	140	PN16	BSP
11V056	2"	2600	50	T	261	120	29	172	140	PN16	BSP
11V057	2 1/2"	5073	65	T	322	150	33	218	160	PN10	BSP





Documentação do Produto



Certificados do Produto

Certificados da Empresa

