






'basic' bi-directional ball valve

Plain/threaded outlet - PTFE

ITEM 644


REFERENCIA	DESCRIPCION	Peso líquido	Volumen (m³)	contenido.peso bruto	Unidades por lote
111D160	V.BOLA BIDIRECCIONAL S/MIXTA 20-1/2" PTFE	0.165	0.02244	6.39	40
111D161	V.BOLA BIDIRECCIONAL S/MIXTA 25-3/4" PTFE	0.210	0.02244	8.01	40
111D162	V.BOLA BIDIRECCIONAL S/MIXTA 32-1" PTFE	0.360	0.04117	8.68	30
111D163	V.BOLA BIDIRECCIONAL S/MIXTA 40-1 1/4" PTFE	0.600	0.04117	12.73	20
111D164	V.BOLA BIDIRECCIONAL S/MIXTA 50-1 1/2" PTFE	0.870	0.04880	9.45	15
111D165	V.BOLA BIDIRECCIONAL S/MIXTA 63-2" PTFE	1.410	0.04880	14.85	10
111D166	V.BOLA BIDIRECCIONAL S/MIXTA 75-2 1/2" PTFE	2.680	0.03129	5.83	4
111D167	V.BOLA BIDIRECCIONAL S/MIXTA 90-3" PTFE	4.290	0.02243	9.05	2



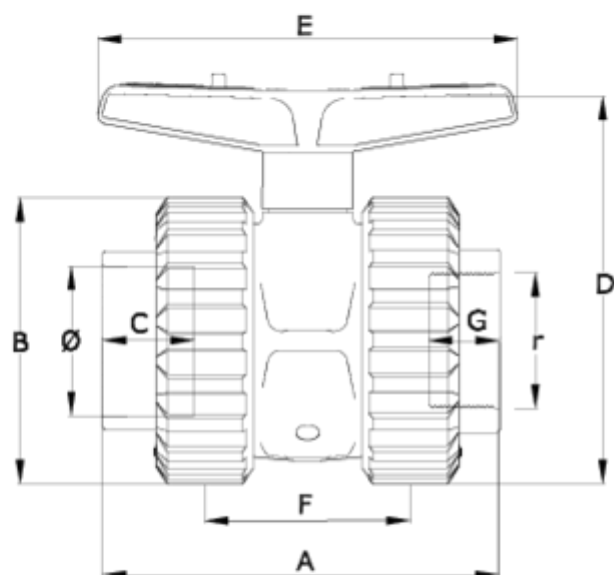




Código	Tamaño (g)	DN	A	B	C	D	E	F	G	H	PN	ROSCA
11D160	20-1/2"	165	15	89	52	16	74	80	47	17	PN16	BSP
11D161	25-3/4"	210	20	99	59	19	80	80	51	20	PN16	BSP
11D162	32-1"	360	25	119	70	23	103	101	66	23	PN16	BSP
11D163	40-1 1/4"	600	32	133	84	25	125	130	72	26	PN16	BSP
11D164	50-1 1/2"	870	40	151	99	31	138	130	77	33	PN16	BSP
11D165	63-2"	1410	50	167	121	38	177	170	90	29	PN16	BSP
11D166	75-2 1/2"	2680	65	210	151	45	215	260	121	33	PN10	BSP
11D167	90-3"	4290	80	245	175	51	252	260	141	36	PN10	BSP





Documenta????o do Produto



Certificados do Produto

Certificados da Empresa

