




Electrofusion fittings/Welding fittings

Electrofusion conical reducing

ITEM 165

REFERÊNCIA	DESCRIÇÃO	Peso líquido	Volume (m ³)	contenido.peso bruto	Unidades por lote
1019131	REDUCCION CONICA ELECTR 25-20	0.055	0.01553	1.43	20
1019132	REDUCCION CONICA ELECTR 32-20	0.048	0.01553	1.20	20
1019133	REDUCCION CONICA ELECTR 32-25	0.058	0.01553	1.49	20
1019134	REDUCCION CONICA ELECTR 40-32	0.082	0.01553	1.96	20
1019135	REDUCCION CONICA ELECTR 50-32	0.126	0.00892	1.45	10
1019136	REDUCCION CONICA ELECTR 50-40	0.096	0.01553	1.77	15
1019137	REDUCCION CONICA ELECTR 63-32	0.133	0.01553	1.66	10
1019138	REDUCCION CONICA ELECTR 63-40	0.141	0.01553	1.74	10
1019139	REDUCCION CONICA ELECTR 63-50	0.145	0.01553	1.78	10
1019140	REDUCCION CONICA ELECTR 90-63	0.460	0.02243	4.17	8
1019141	REDUCCION CONICA ELECTR 110-90	0.550	0.03129	4.97	8
1019142	REDUCCION CONICA ELECTR 125-90	0.717	0.03129	4.88	6
1019143	REDUCCION CONICA ELECTR 160-110	1.675	0.06150	9.30	5
1019144	REDUCCION CONICA ELECTR 180-125	2.090	0.06150	9.34	4



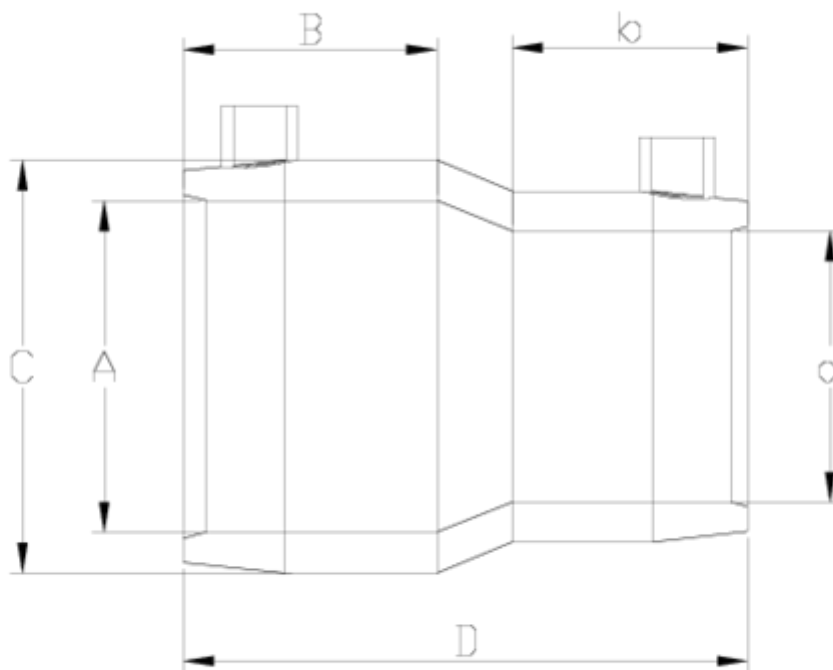

ITEM 165 | Electrofusion conical reducing

Código	f tubo-A-a	Peso (g)	B	b	C	D	PN	MEDIDA
19131	25-20	59	43	38	34	82	PN16	MÉTRICO
19132	32-20	71	43	39	42	90	PN16	MÉTRICO
19133	32-25	60	40	40	44	85	PN16	MÉTRICO
19134	40-32	72	42	43	52	90	PN16	MÉTRICO
19135	50-32	96	47	42	63	98	PN16	MÉTRICO
19136	50-40	136	43	39	66	96	PN16	MÉTRICO
19137	63-32	171	53	42	77	117	PN16	MÉTRICO
19138	63-40	176	55	44	81	117	PN16	MÉTRICO
19139	63-50	189	53	47	77	117	PN16	MÉTRICO
19140	90-63	360	67	63	113	148	PN16	MÉTRICO






ITEM 165 | Electrofusion conical reducing

19141	110-90	657	84	78	137	187	PN16	MÉTRICO
19142	125-90	878	89	76	155	205	PN16	MÉTRICO
19143	160-110	1200	75	72	193	178	PN16	MÉTRICO
19144	180-125	2000	97	70	220	247	PN16	MÉTRICO





Documentação do Produto



Certificados do Produto

Certificados da Empresa

