




'basic' bi-directional ball valve

Female threaded outlet - 220V electric actuator - PTFE ITEM 656

REFERENCIA	DESCRIPCION	Peso líquido	Volumen (m³)	contenido.peso bruto	Unidades por lote
111D309	V.BOLA BIDIREC. ACT.ELEC.R/H 1/2"	1.216	0.03648	1.22	1
111D310	V.BOLA BIDIREC. ACT.ELEC.R/H 3/4"	1.276	0.03648	1.28	1
111D311	V.BOLA BIDIREC. ACT.ELEC.R/H 1"	1.450	0.03648	1.45	1
111D312	V.BOLA BIDIREC. ACT.ELEC.R/H 1 1/4"	26.096	0.03648	26.10	1
111D313	V.BOLA BIDIREC. ACT.ELEC.R/H 1 1/2"	3.275	0.04460	3.97	1
111D314	V.BOLA BIDIREC. ACT.ELEC.R/H 2"	4.018	0.03648	4.51	1
111D315	V.BOLA BIDIREC. ACT.ELEC.R/H 2 1/2"	4.610	0.02243	5.04	1
111D316	V.BOLA BIDIREC. ACT.ELEC.R/H 3"	6.760	0.02243	7.18	1



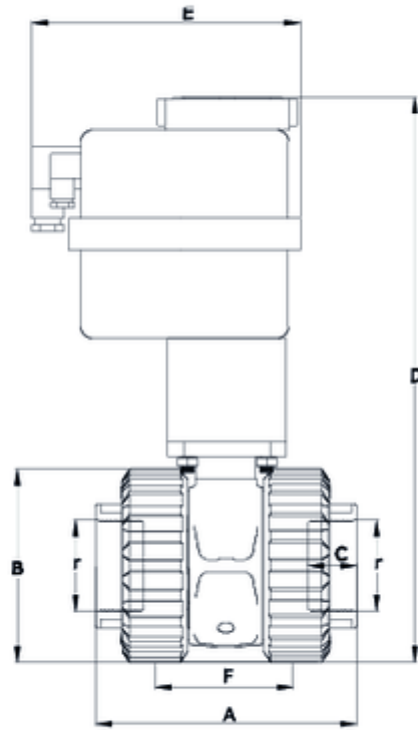

ITEM 656 | Female threaded outlet - 220V electric actuator - PTFE

C??DIGO	r	Actuador	PESO (g)	DN	A	B	C	D	E	F	PN	TIPO ROSCA
11D309	1/2"	H10	1080	15	86	55	17	227	177	44	PN16	BSP
11D310	3/4"	H10	1124.2	20	99	62	20	232	177	49	PN16	BSP
11D311	1"	H10	1261.1	25	122	72	23	243	177	66	PN16	BSP
11D312	1 1/4"	H20	2119.85	32	131	88	26	265	177	71	PN16	BSP
11D313	1 1/2"	H20	2398.24	40	155	103	33	282	177	75	PN16	BSP
11D314	2"	H20	2952	50	180	120	29	390	177	89	PN16	BSP
11D315	2 1/2"	H35	4610	65	202	150	33	401	177	119	PN10	BSP
11D316	3"	H55	6760	80	232	181	36	450	177	140	PN10	BSP





Documenta????o do Produto



Certificados do Produto

Certificados da Empresa

