




PP fittings for polyethylene

# Reinforced female threaded straight union

## ITEM 101

| REFERÊNCIA | DESCRIÇÃO                     | Peso líquido | Volume (m³) | contenido.peso bruto | Unidades por lote |
|------------|-------------------------------|--------------|-------------|----------------------|-------------------|
| 1012112    | ENLACE M/H REFORZADO 25-1/2"  | 0.088        | 0.03129     | 9.38                 | 100               |
| 1012114    | ENLACE M/H REFORZADO 32-3/4"  | 0.130        | 0.04460     | 13.77                | 100               |
| 1012138    | ENLACE M/H REFORZADO 20-1/2"  | 0.060        | 0.02244     | 6.46                 | 100               |
| 1012139    | ENLACE M/H REFORZADO 25-3/4"  | 0.087        | 0.03129     | 9.31                 | 100               |
| 1012140    | ENLACE M/H REFORZADO 32-1"    | 0.127        | 0.04460     | 13.43                | 100               |
| 1012141    | ENLACE M/H REFORZADO 40-1 1/4 | 0.232        | 0.04460     | 13.72                | 56                |
| 1012142    | ENLACE M/H REFORZADO 50-1 1/2 | 0.332        | 0.04460     | 14.02                | 40                |
| 1012143    | ENLACE M/H REFORZADO 63-2"    | 0.599        | 0.06150     | 17.70                | 28                |
| 1012144    | ENLACE M/H REFORZADO 75-2 1/2 | 0.928        | 0.03682     | 9.83                 | 10                |
| 1012145    | ENLACE M/H REFORZADO 90-3"    | 1.481        | 0.04460     | 8.10                 | 5                 |
| 1012146    | ENLACE M/H REFORZADO 110-4"   | 2.134        | 0.02244     | 4.80                 | 2                 |



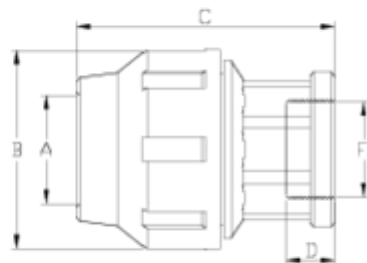

## ITEM 101 | Reinforced female threaded straight union

| Código | f tubo - F  | Peso (g) | A  | B   | C   | D  | PN   | TIPO ROSCA |
|--------|-------------|----------|----|-----|-----|----|------|------------|
| 12138  | 20 - 1/2"   | 63       | 21 | 46  | 76  | 18 | PN16 | BSP        |
| 12212  | 25 - 1/2"   | 93       | 26 | 55  | 83  | 18 | PN16 | BSP        |
| 12139  | 25 - 3/4"   | 90       | 26 | 55  | 84  | 21 | PN16 | BSP        |
| 12214  | 32 - 3/4"   | 135      | 33 | 63  | 92  | 21 | PN16 | BSP        |
| 12140  | 32 - 1"     | 130      | 33 | 63  | 93  | 23 | PN16 | BSP        |
| 12141  | 40 - 1 1/4" | 218      | 42 | 76  | 112 | 25 | PN16 | BSP        |
| 12142  | 50 - 1 1/2" | 314      | 51 | 91  | 119 | 25 | PN16 | BSP        |
| 12143  | 63 - 2"     | 550      | 64 | 109 | 141 | 29 | PN16 | BSP        |
| 12144  | 75 - 2 1/2" | 902      | 77 | 133 | 169 | 34 | PN10 | BSP        |
| 12145  | 90 - 3"     | 1494     | 92 | 159 | 204 | 38 | PN10 | BSP        |





ITEM 101 | Reinforced female threaded straight union

|       |          |      |     |     |     |    |      |     |
|-------|----------|------|-----|-----|-----|----|------|-----|
| 12146 | 110 - 4" | 2064 | 112 | 183 | 231 | 50 | PN10 | BSP |
|-------|----------|------|-----|-----|-----|----|------|-----|





## Documentación del Producto



## Certificados del Producto



## Certificados da Empresa

