





PVC-U pressure fittings


90° elbow, reinforced female threaded outlet 1

ITEM 433

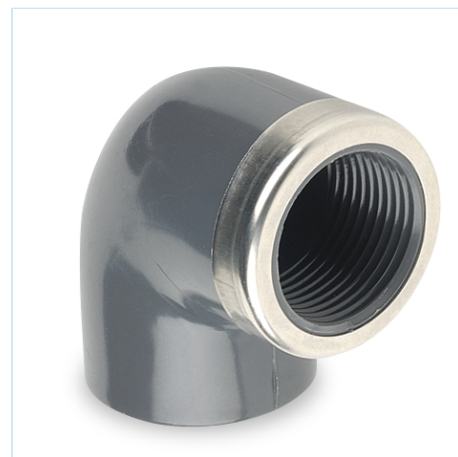


REFERÊNCIA	DESCRIÇÃO	Peso líquido	Volume (m³)	contenido.peso bruto	Unidades por lote
1002061	CODO 90° ENC-R/H REF 75-11/2"	0.624	0.03129	12.48	20
1002062	CODO 90° ENC-R/H REF 75-2"	0.580	0.03129	11.61	20
1002063	CODO 90° ENC-R/H REF 90-2"	0.910	0.03680	11.61	12
1002064	CODO 90° ENC-R/H REF 90-2 1/2"	1.020	0.03680	12.92	12
1002160	CODO 90° ENC-R/H REF 20-1/2"	0.025	0.00892	2.66	100
1002161	CODO 90° ENC-R/H REF 25-3/4"	0.039	0.02243	4.37	100
1002162	CODO 90° ENC-R/H REF 32-1"	0.070	0.02244	7.82	100
1002163	CODO 90° ENC-R/H REF 40-1 1/4"	0.127	0.03129	13.25	100
1002164	CODO 90° ENC-R/H REF 50-1 1/2"	0.173	0.04717	17.97	100
1002165	CODO 90° ENC-R/H REF 63-2"	0.309	0.04879	16.04	50
1002166	CODO 90° ENC-R/H REF 75-2 1/2"	0.456	0.04880	14.44	30
1002167	CODO 90° ENC-R/H REF 90-3"	0.876	0.04836	16.43	18



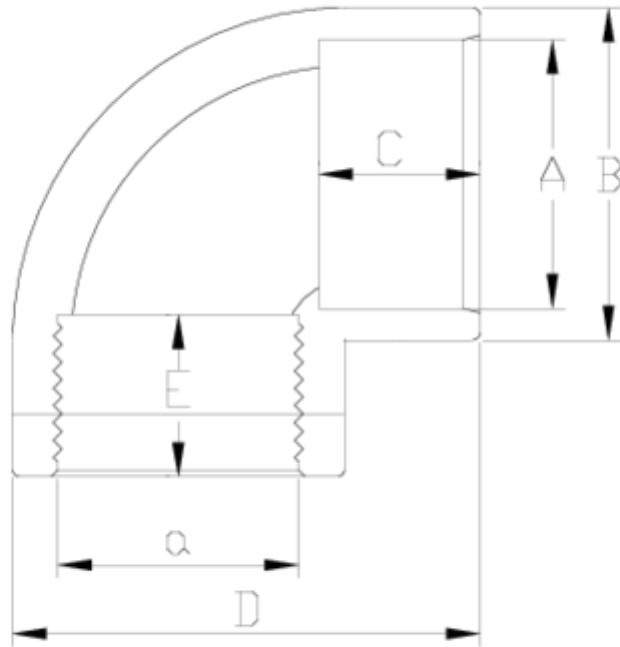

ITEM 433 | 90° elbow, reinforced female threaded outlet 1

Código	A-a	Peso (g)	B	C	D	E	PN	ROSCA
02160	20-1/2"	32	27	16	41	16	PN10	BSP
02161	25-3/4"	45	33	19	50	17	PN10	BSP
02162	32-1"	79	41	22	61	21	PN10	BSP
02163	40-1 1/4"	134	50	26	74	23	PN10	BSP
02164	50-1 1/2"	163	61	31	88	24	PN10	BSP
02165	63-2"	296	75	38	109	28	PN10	BSP
02061	75-1 1/2"	614	89	44	129	24	PN10	BSP
02062	75-2"	589	89	44	129	28	PN10	BSP
02166	75-2 1/2"	452	89	44	129	32	PN10	BSP
02063	90-2"	1070	108	51	156	28	PN10	BSP






ITEM 433 | 90° elbow, reinforced female threaded outlet 1


02064	90-2 1/2"	1025	108	51	156	32	PN10	BSP
02167	90-3"	861	108	51	156	35	PN10	BSP



Documentación del Producto



Certificados del Producto



Certificados de la Empresa

